
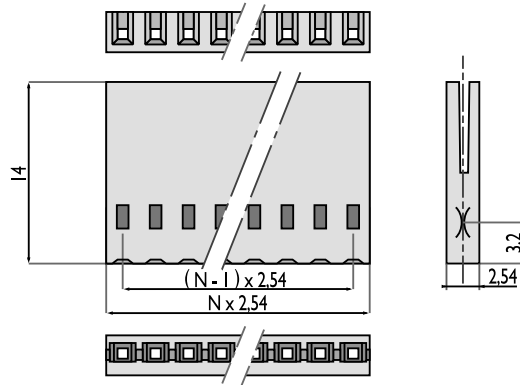



CRIMPFLEX® housings

HOUSING SERIES OF xx

- Removable connection with all types of 0.635 mm (.025") square or round pin headers.
- Housings are side to side and end to end stackable.
- Standard single housing for use with all female contacts or long male pins.

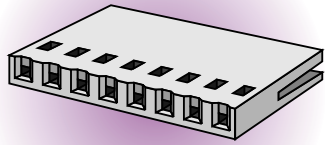

→ Mates with headers (tin or gold plated)
 ref. 12-17-111-xx-1
 ref. 12-17-141-xx-1
 (refer to page 34)





POLARIZATION	LOCKING SYSTEM	NUMBER OF ROWS	NUMBER OF WAYS XX
NO	NO	1	02 → 25 (on request : 26 → 51)


Dimensions in mm

HOUSING SERIES 4F xx

- This housing allows connection of a double row flexcable jumper onto a 2 rows, 0.635 mm (.025") square or round pin header.
- Housings are end to end stackable.

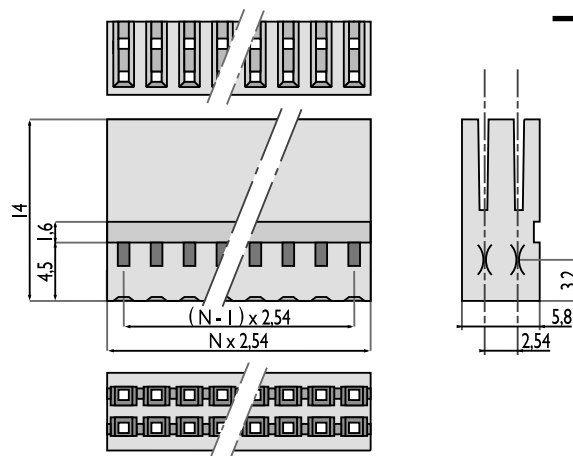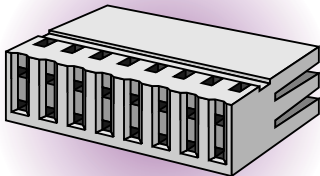

→ Mates with headers (tin or gold plated)
 ref. 16-17-111-xx-1
 ref. 16-17-141-xx-1
 (refer to page 34)



POLARIZATION	LOCKING SYSTEM	NUMBER OF ROWS	NUMBER OF WAYS XX
NO	NO	2	04 → 50

Dimensions in mm